


Features: (typical values)

- Output Power – 2500mW. @ 1dB. compression, f=100 MHZ
- Low Noise Figure – 3.6 dB.
- IP3 – 46 dBm. @ f = 200 MHZ
- IP2 – 70 dBm.
- Usable for 50 – 100 ohm systems
- Unconditional Stability

**1 – 200 MHz
35.0 dB CATV Wideband Linear
Amplifier**

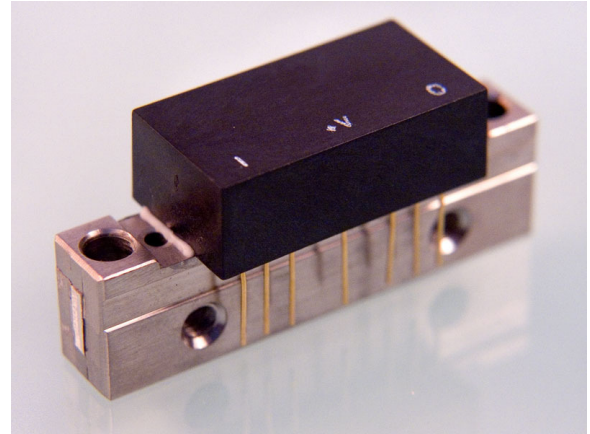

Maximum Ratings

Storage temperature -55°C to +125°C
 DC Operating Voltage +28.0 volts
 RF Input Voltage +5 dBm. Max.
 Operating Base Temp. -40 to +90°C

Specifications @ Tcase = 25°C, Vcc = 24V, 50 ohm systems unless otherwise noted.

Parameter	Typical Conditions	Min Value	Max Value	Units
Frequency Range		1	200	MHZ.
Power Gain	35.5	34.0	37.0	dB.
Gain Flatness (peak to peak)	0.5		1.0	dB.
Input VSWR	1.5		2.0:1	-
Output VSWR	1.5		2.0:1	-
Noise Figure (f = 200mhz)	4.5		6.5	dB.
Power Output- 1dB Compression (f = 1-200 MHz)	1500	1260		mW.
Power Output- 1 dB Compression (f=150 MHz)	2000			mW.
Third Order Intercept (IP3)	48	45		dBm.
Second Order Intercept (IP2)	70	60		dBm.
Peak Envelope Power (PEP)	900	600		mW.
Supply Current	430		500	mA.

Pin Configuration

PIN#	Description
1	Input
2,3,7,8	Ground
5	+V.
9	Output
4, 6	Not used

