

Wide Band RF Amplifier

- * Operating Frequency : 2.5-6 GHz
- * Saturated Power : 20W Psat Typical
- * Gain : 24 dB
- * Operation Up to 28 Volts
- * Available with single supply voltage



Description: Ultra wideband operation, Fiber Drivers, Test Instrumentation, All Purpose Power Amp

ELECTRICAL SPECIFICATION @ VDD= +28 VDC/-5VDC; Temp. = 25°C, 50Ω System

Parameter	Symbol	Min	Typ	Max	Unit
Operating Frequency	BW	2.5		6	GHz
Gain	G	22	24		dB
Gain Flatness	Δ G		±1.0	±2.0	dB
Power Added Efficiency	PAE		30		%
Power Output	Psat	42	43		dBm
Return Loss in/out	S11/S22	2.5:1	2.0:1		Ratio
Operating Voltage	Vdc		+28/-5		Volt
Operating Current Idq	Idq		1200		mA

MECHANICAL SPECIFICATION

Parameter	Description	Limits	Units
Dimension	2x1x0.5		inches
RF Connectors IN/OUT	SMA-F		
DC Connector	Filtered DC		

PROTECTIONS

	Max	
RF Input Power	20	dBm
Reverse Polarity Protection	Optional	
Load VSWR	5:01	RATIO
Stability	Unconditional	

ENVIROMENTAL CHARACTERISTICS


Parameter	Symbol	Min.	Typ.	Max	Units
Operating Case Temperature	Tc	0		75	°C
Storage Temperature	Tstg	-55		125°C	°C

3009 Old State Rd, Telford, Pa 18969

Web: www.amplifiersolutions.com
 Email: sales@amplifiersolutions.com

Tel: 215-799-2561
 Fax: 215-799-2563

OUTLINE

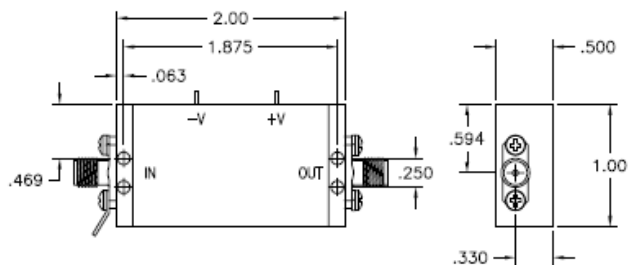

3009 Old State Rd, Telford, Pa 18969

Web: www.amplifiersolutions.com
Email: sales@amplifiersolutions.com

Tel: 215-799-2561
Fax: 215-799-2563