

## Wide Band RF Amplifier

- \* Operating Frequency :0.3-3.5 GHz
- \* Saturated Power : 16W Psat Typical
- \* Gain : 10 dB
- \* Operation Up to 28 Volts



**Description:** Ultra wideband operation, Fiber Drivers, Test Instrumentation, All Purpose Power Amp

### ELECTRICAL SPECIFICATION @ VDD= +28 VDC, -5VDC; Temp. = 25 °C, 50Ω System

Parameter	Symbol	Min	Typ	Max	Unit
Operating Frequency	BW	0.3		3.5	GHz
Gain	G	8	10		dB
Gain Flatness	Δ G		±1.0	±1.5	dB
Power Added Efficiency	PAE		30		%
Power Output	Psat	40	42		dBm
Return Loss in/out	S11/S22	2.5:1	2.0:1		Ratio
Operating Voltage	Vdc		-5,+28		Volt
Operating Current Idq	Idq		300		mA

### MECHANICAL SPECIFICATION

Parameter	Description	Limits	Units
Dimension	2x1x0.50		inches
RF Connectors IN/OUT	SMA-F		
DC Connector	Filtered DC		

### PROTECTIONS

	Max	
RF Input Power	35	dBm
Reverse Polarity Protection		
Load VSWR	5:01	RATIO
Stability	Unconditional	


### ENVIROMENTAL CHARACTERISTICS

Parameter	Symbol	Min.	Typ.	Max	Units
Operating Case Temperature	Tc	0		75	°C
Storage Temperature	Tstg	-55		125°C	°C

Email: [sales@amplifiersolutions.com](mailto:sales@amplifiersolutions.com)

Fax: 215-997-7857

# Outline

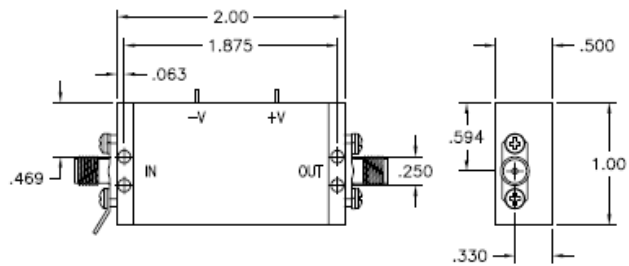

Email: [sales@amplifiersolutions.com](mailto:sales@amplifiersolutions.com)

Fax: 215-997-7857