


Features: (typical values)

- Output Power – 1000mW @ 1dB compression, f=30 MHz
- Very high Gain
- Low Noise Figure – 3.6 dB
- IP3 – 45 dBm @ f = 30 MHz
- IP2 – 90 dBm
- Usable for 50 – 100 ohm systems
- Unconditional Stability

**2 – 32 MHz
28 dB CATV Wideband Linear
Amplifier**

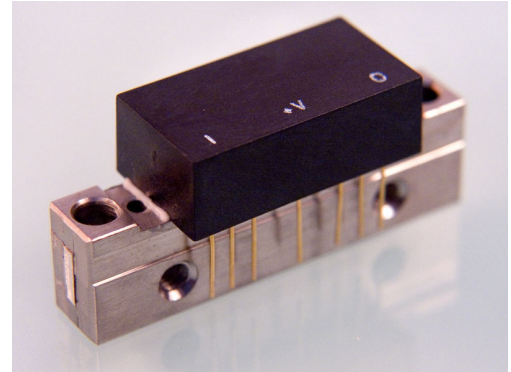

Maximum Ratings

Storage temperature -40°C to +100°C
 DC Operating Voltage +28.0 volts
 RF Input Voltage +5 dBm. Max.
 Operating Base Temp. -20 to +100°C

Specifications @ Tcase = 25°C, Vcc = 24V, 50 ohm systems unless otherwise noted.

Parameter	Typical Conditions	Min Value	Max Value	Units
Frequency Range		2	32	MHz.
Power Gain	28	27		dB.
Gain Flatness (peak to peak)	0.5		1.0	dB.
Input VSWR	1.4		2.0:1	-
Output VSWR	1.4		2.0:1	-
Noise Figure(f = 32 Mhz)	3.6		5.5	dB.
Power Output- 1db Compression	1000	700		mW.
Third Order Intercept (IP3)	43	40		dBm.
Second Order Intercept (IP2)	90	80		dBm.
Supply Current	320		340	mA.

Pin Configuration

PIN#	Description
1	Input
2,3,7,8	Ground
5	+V.
9	Output
4, 6	Not used

